

Höchstdruckschläuche

Schläuche mit zwei Drahteinlagen und gewickelter Decke. Typ 2SC. DN 10. 3,5-fache Sicherheit. Edelstahl Armaturen. Max. 150 °C

Dichtkegel (DKOS)

AGR : AGR

Handverschraubung

M22 : M22


M22 : M22

3/8" : 3/8"

3/8" : 3/8"

M22 : M22

M22 : M22



Typ 2SC. Max. 500 bar

Typ 2SC. Max. 500 bar

Typ 2SC. Max. 500 bar

Typ 2SC. Max. 500 bar

Typ 2SC. Max. 500 bar

Typ 2SC. Max. 500 bar

R+M Nr.	
358 177 310 9	10 m
358 177 315 9	15 m
358 177 320 9	20 m
358 177 330 9	30 m

R+M Nr.	
364 177 310 9	10 m
364 177 315 9	15 m
364 177 320 9	20 m
364 177 330 9	30 m

R+M Nr.	
358 144 310 9	10 m
358 144 315 9	15 m
358 144 320 9	20 m
358 144 330 9	30 m

R+M Nr.	
364 144 310 9	10 m
364 144 315 9	15 m
364 144 320 9	20 m
364 144 330 9	30 m

R+M Nr.	
358 100 310 9	10 m
358 100 315 9	15 m
358 100 320 9	20 m
358 100 330 9	30 m

R+M Nr.	
364 100 310 9	10 m
364 100 315 9	15 m
364 100 320 9	20 m
364 100 330 9	30 m

Schläuche mit zwei Drahteinlagen und gewickelter Decke. DN 10. Edelstahl Armaturen. Max. 150 °C

Schläuche mit zwei Drahteinlagen und glatter Decke. DN 6. Edelstahl Armaturen. Max. 150 °C

Handverschraubung

Handverschraubung / AGR

M24 : M24



M24 : M24

M24 : M24

M22 : M22

M22 : 1/8"

1/4" : 1/4"



2SC. Max. 500 bar

2SC. Max. 500 bar

2SN. Max. 600 bar

flexy 500. Max. 500 bar

flexy 500. Max. 500 bar

flexy 500. Max. 500 bar

R+M Nr.	
358 197 310 9	10 m
358 197 315 9	15 m
358 197 320 9	20 m
358 197 330 9	30 m

R+M Nr.	
364 197 310 9	10 m
364 197 315 9	15 m
364 197 320 9	20 m
364 197 330 9	30 m

R+M Nr.	
368 697 610 9	10 m
368 697 615 9	15 m
368 697 620 9	20 m
368 697 630 9	30 m


R+M Nr.	
338 000 310 9	10 m
338 000 315 9	15 m
338 000 320 9	20 m
338 000 330 9	30 m

R+M Nr.	
424 300 010 9	10 m
424 300 015 9	15 m
424 300 020 9	20 m
424 300 030 9	30 m

R+M Nr.	
424 344 010 9	10 m
424 344 015 9	15 m
424 344 020 9	20 m
424 344 030 9	30 m

Höchstdruckschlauchaufroller

SoST

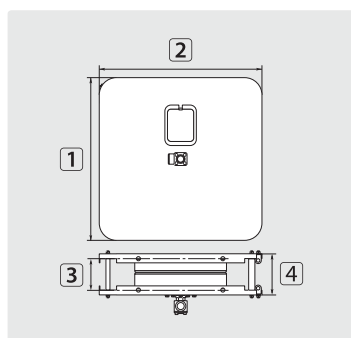

TYP	Außen Ø = Schlauch
01	15,0 mm = 20 m

Schwenkkonsolen SoST



Edelstahl V2A / AISI 304

R+M Nr.
741 01

Edelstahl V2A / AISI 304

R+M Nr.	1	2	3	4	TYP
740 011	1/4" IG	1/2" IG	05	500 bar	90 °C