


easywash365+ Strahlrohre by Suttner

Neu

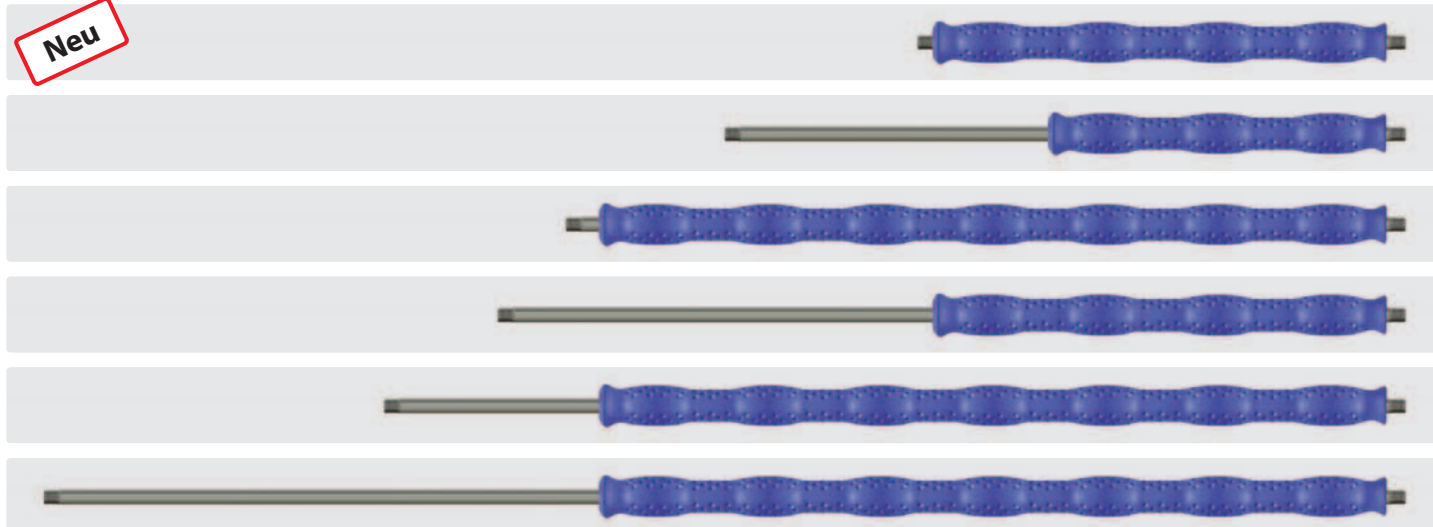


Edelstahl. Strahlrohr mit umspritzter Isolierung Cool & Compact. Max. 400 bar / 150 °C

R+M Nr.	ISO	⌀	↔	Ⓒ
200 129 410	400 mm	1/4" AG	433 mm	1/4" AG
200 129 306	300 mm	1/4" AG	600 mm	1/4" AG
200 129 707	700 mm	1/4" AG	740 mm	1/4" AG
200 129 408	400 mm	1/4" AG	800 mm	1/4" AG
200 129 709	700 mm	1/4" AG	900 mm	1/4" AG
200 129 712	700 mm	1/4" AG	1200 mm	1/4" AG

Restposten

Restposten

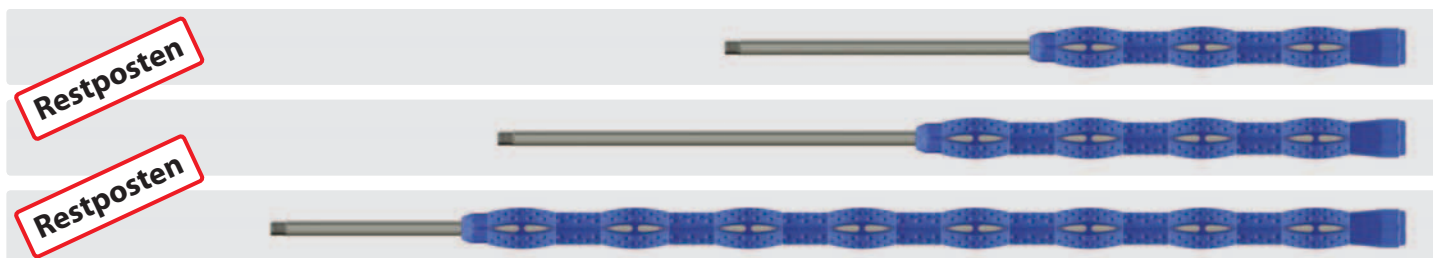

Edelstahl. Strahlrohr mit Isolierung ST-9.1. Max. 400 bar / 150 °C

R+M Nr.	ISO	⌀	↔	Ⓒ
200 009 350	335 mm	1/4" AG	600 mm	1/4" AG
200 009 351	410 mm	1/4" AG	800 mm	1/4" AG
200 009 355	810 mm	1/4" AG	1000 mm	1/4" AG



Edelstahl. Strahlrohr mit umspritzter Isolierung. Max. 400 bar / 150 °C

R+M Nr.	ISO	⌀	↔	Ⓒ
200 029 709	700 mm	1/4" AG	900 mm	1/4" AG



Edelstahl. Strahlrohr mit umspritzter Isolierung. Max. 400 bar / 150 °C

R+M Nr.	ISO	⌀	↔	Ⓒ
200 029 712	700 mm	1/4" AG	1200 mm	1/4" AG