

Kombidüsenträger


ST-56 Kugelkombidüsen



ST-56 Kugelkombidüsen



Funktionsprinzip einer Kugelkombidüse

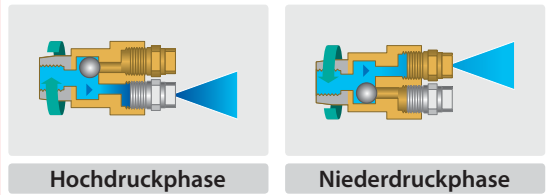

R+M Nr.	☺	☻	M
200 056 500	2 x 1/4" IG	1/4" IG	Messing
200 056 600	2 x 1/4" IG	1/4" IG	Edelstahl

R+M Nr.	☺	☻
656 51	2 x 1/4" IG	M18 IG

ST-52 Variopress



ST-58 Umschaltventile



R+M Nr.	☺	☻
200 052 500	1/4" IG	1/4" IG

R+M Nr.	☺	☻
200 058 600	1/4" IG	1/4" IG

Mini Schwallregeldüsen




R+M Schwallregeldüsen



ST-51 Schwallregeldüsen



Funktionsprinzip einer Schwallregeldüse

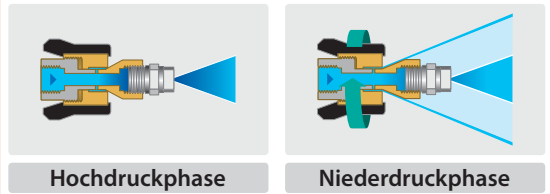


R+M Nr.	☺	☻
657 20	1/4" IG	1/4" IG

R+M Nr.	☺	☻
657 30	1/4" IG	1/4" IG

R+M Nr.	☺	☻
200 051 530	1/4" IG	1/4" IG

Konfektionierte Lanzen

Unterbodenlanzen

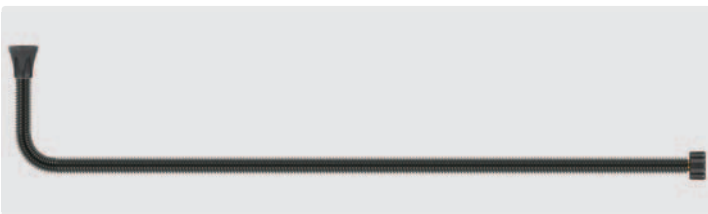

Lanze mit Düsenschutz ST-10 ohne Hochdruckdüse. Höhe 190 mm

R+M Nr.	☺	☻	☼	M
515 01	1/4" IG NPT	900 mm	HV M22	Stahl verzinkt

WC / Dachrinnenlanzen



Lanze mit Schwallregeldüse ohne Hochdruckdüse

R+M Nr.	☺	☻	☼	M
513 112	1/4" IG	500 mm	HV M22	Stahl verzinkt

Symbole ☺ Eingang ☻ Ausgang ☼ Material ☼ Länge ☼ Gewicht