

CARWASH COMFORT - erleben Sie unser blaues Wunder in Nennweite 8!

Hochzugfeste Polyesterarmierung, Arbeitsdruckbeständigkeit bis 200 bar. DN 8. -40 °C – +60 °C, -40 °F – +140 °F

1/4" : 1/4"



Dichtkegel (DKR)

R+M Nr.	
471 052 603 5	3,5 m
471 052 603 7	3,7 m
471 052 604 0	4,0 m
471 052 604 2	4,2 m
471 052 604 5	4,5 m
471 052 604 7	4,7 m
471 052 605 0	5,0 m
471 052 605 5	5,5 m
471 052 606 0	6,0 m

3/8" : 3/8"



Dichtkegel (DKR)

R+M Nr.	
471 054 603 5	3,5 m
471 054 603 7	3,7 m
471 054 604 0	4,0 m
471 054 604 2	4,2 m
471 054 604 5	4,5 m
471 054 604 7	4,7 m
471 054 605 0	5,0 m
471 054 605 5	5,5 m
471 054 606 0	6,0 m

M14 : M14



Dichtkegel (DKOL)

R+M Nr.	
471 072 603 5	3,5 m
471 072 603 7	3,7 m
471 072 604 0	4,0 m
471 072 604 2	4,2 m
471 072 604 5	4,5 m
471 072 604 7	4,7 m
471 072 605 0	5,0 m
471 072 605 5	5,5 m
471 072 606 0	6,0 m

M18 : M18



Dichtkegel (DKOL)

R+M Nr.	
471 076 603 5	3,5 m
471 076 603 7	3,7 m
471 076 604 0	4,0 m
471 076 604 2	4,2 m
471 076 604 5	4,5 m
471 076 604 7	4,7 m
471 076 605 0	5,0 m
471 076 605 5	5,5 m
471 076 606 0	6,0 m

3/8" : 3/8"



AGR : AGR


R+M Nr.	
471 044 603 5	3,5 m
471 044 603 7	3,7 m
471 044 604 0	4,0 m
471 044 604 2	4,2 m
471 044 604 5	4,5 m
471 044 604 7	4,7 m
471 044 605 0	5,0 m
471 044 605 5	5,5 m
471 044 606 0	6,0 m

Hochdruckschläuche für SB-Waschanlagen

Hochdruckschläuche mit einer Drahteinlage und gewickelter Decke. 15N. Nennweite 6. Max. 210 bar /150 °C

1/4" : 1/4"	3/8" : 3/8"	1/4" : 1/4"	M14 : M14	M14 : M14																																										
																																														
Dichtkegel (DKR)	Dichtkegel (DKR)	Dichtkegel (DKR)	Dichtkegel (DKOL) VA	Dichtkegel (DKOL)																																										
<table><tr><th>R+M Nr.</th><th></th></tr><tr><td>331 152 803 5</td><td>3,5 m</td></tr><tr><td>331 152 804 2</td><td>4,2 m</td></tr><tr><td>331 152 805</td><td>5,0 m</td></tr></table>	R+M Nr.		331 152 803 5	3,5 m	331 152 804 2	4,2 m	331 152 805	5,0 m	<table><tr><th>R+M Nr.</th><th></th></tr><tr><td>331 154 803 5</td><td>3,5 m</td></tr><tr><td>331 154 804 2</td><td>4,2 m</td></tr><tr><td>331 154 805</td><td>5,0 m</td></tr></table>	R+M Nr.		331 154 803 5	3,5 m	331 154 804 2	4,2 m	331 154 805	5,0 m	<table><tr><th>R+M Nr.</th><th></th></tr><tr><td>331 152 603 5</td><td>3,5 m</td></tr><tr><td>331 152 604</td><td>4,0 m</td></tr><tr><td>331 152 604 2</td><td>4,2 m</td></tr><tr><td>331 152 605 5</td><td>5,5 m</td></tr></table>	R+M Nr.		331 152 603 5	3,5 m	331 152 604	4,0 m	331 152 604 2	4,2 m	331 152 605 5	5,5 m	<table><tr><th>R+M Nr.</th><th></th></tr><tr><td>331 172 803 59</td><td>3,5 m</td></tr><tr><td>331 172 804 29</td><td>4,2 m</td></tr><tr><td>331 172 804 79</td><td>4,7 m</td></tr></table>	R+M Nr.		331 172 803 59	3,5 m	331 172 804 29	4,2 m	331 172 804 79	4,7 m	<table><tr><th>R+M Nr.</th><th></th></tr><tr><td>331 172 603 5</td><td>3,5 m</td></tr><tr><td>331 172 604</td><td>4,0 m</td></tr><tr><td>331 172 605</td><td>5,0 m</td></tr></table>	R+M Nr.		331 172 603 5	3,5 m	331 172 604	4,0 m	331 172 605	5,0 m
R+M Nr.																																														
331 152 803 5	3,5 m																																													
331 152 804 2	4,2 m																																													
331 152 805	5,0 m																																													
R+M Nr.																																														
331 154 803 5	3,5 m																																													
331 154 804 2	4,2 m																																													
331 154 805	5,0 m																																													
R+M Nr.																																														
331 152 603 5	3,5 m																																													
331 152 604	4,0 m																																													
331 152 604 2	4,2 m																																													
331 152 605 5	5,5 m																																													
R+M Nr.																																														
331 172 803 59	3,5 m																																													
331 172 804 29	4,2 m																																													
331 172 804 79	4,7 m																																													
R+M Nr.																																														
331 172 603 5	3,5 m																																													
331 172 604	4,0 m																																													
331 172 605	5,0 m																																													

M22 : 10  dreh.

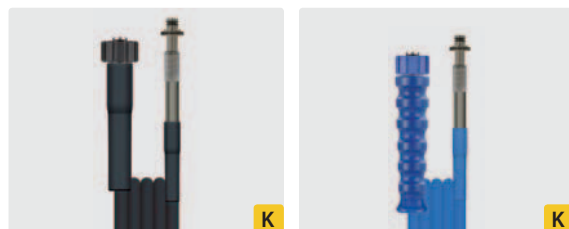

HV : Stecknippel mit Lager

HV : Stecknippel mit Lager

R+M Nr.	
330 117 303 5	3,5 m
330 117 304	4,0 m
330 117 304 2	4,2 m
330 117 310	10,0 m

R+M Nr.	
331 117 303 5	3,5 m
331 117 304	4,0 m
331 117 304 2	4,2 m
331 117 305	5,0 m
331 117 310	10,0 m

Weitere Hochdruckschläuche für SB-Waschanlagen liefern wir auf Anfrage.